


## 8892300 Series Surface Mount

To + VDC (fuse @ 1A): ..... **RED**

To Chassis Ground: ..... **BLACK**

For Synchronization: ..... **YELLOW**

Connect **YELLOW** wires of all heads together for synchronization  
(All heads must be set at the same pattern)

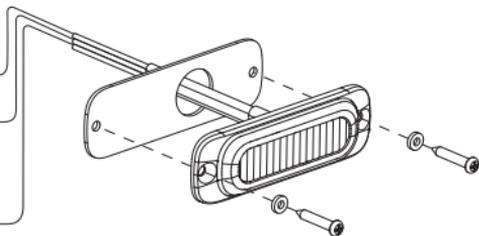

### For Simultaneous or Alternating Flash:

- Apply +VDC to **RED** and **YELLOW** wires simultaneously to enter Grouping mode; lighthouse will display short (single or double) flashes:
  - Single flash = Group1
  - Double flash = Group2
- Remove **YELLOW** wire from +VDC and momentarily apply to +VDC to change Groups:
  - Heads in the same Group flash together.
  - Group1 Heads alternate with Group2 Heads.

For Flash Pattern, momentarily apply +VDC to **YELLOW** wire:

- once for next pattern
- quickly three times for reset to FP#1 (see flash pattern chart)

**NOTE:** This unit may not be factory set at Flash Pattern 1.

| FP# | Flash Patterns |                        |
|-----|----------------|------------------------|
| 1   | Random         | 7 Quad                 |
| 2   | Steady         | 8 Quint                |
| 3   | Single         | 9 8 Flash              |
| 4   | Mega           | 10 Single-Quad         |
| 5   | Double         | 11 Single H/L          |
| 6   | Triple         | 12 Single-Triple-Quint |