

CLASS 3 TRAILER HITCH

R3-0120

Town & Country/ Caravan/ Routan

TOOLS REQUIRED: Ratchet, Torque Wrench, Socket Extension, Small Flat Screw Driver



DRILLS: None

SOCKETS: 13mm, 15mm, 18mm

HITCH RATING: 4,000 LBS WEIGHT CARRYING, 400 LBS TONGUE WEIGHT / 5,000 LBS WEIGHT DISTRIBUTING, 500 LBS TONGUE WEIGHT.
WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

Note: Hitch uses existing vehicle hardware for attachment. No additional hardware required.

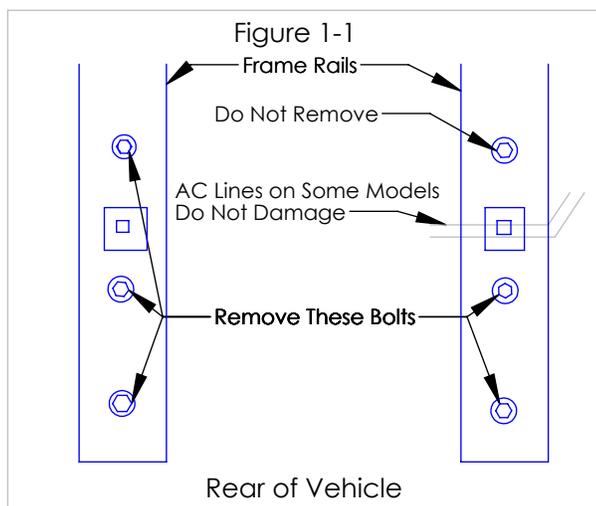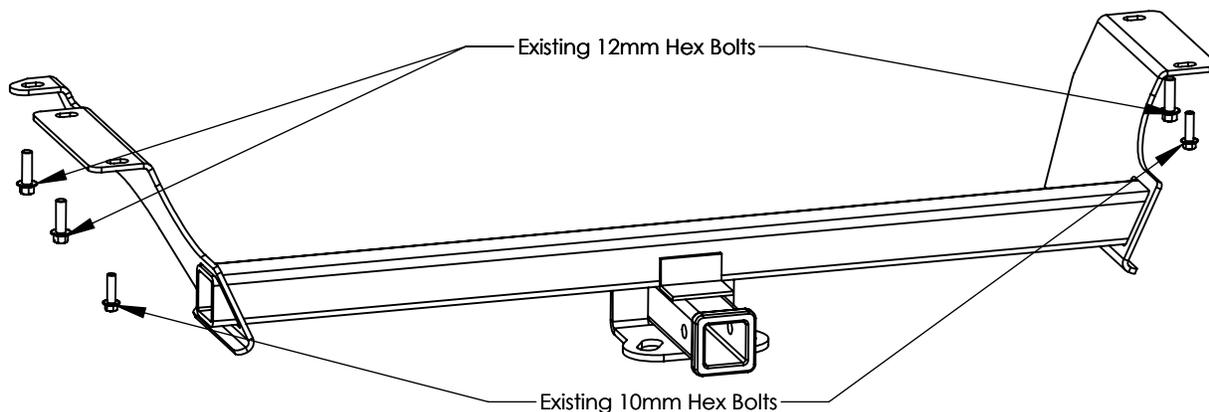

1. Temporarily lower exhaust by removing the bolt that attaches the rearmost exhaust hanger to the passenger's side frame rail. Save bolt for reinstallation.
 2. Remove the existing bolts from the frame rails as shown in Figure 1-1. (3) on driver's side, and (2) on the passenger's side. Save all bolts for reinstallation.
 3. Raise hitch into position and attach with bolts removed in step 2. Leave bolts loose.
- Note:** Some models have AC lines on passenger's side, use care not to damage.
4. Push hitch toward the driver's side to create maximum clearance for exhaust and tighten all fasteners. The (2) 10mm bolts get tightened to 38 LB-FT. The (3) 12mm bolts get tightened to 68 LB-FT.
 5. Raise exhaust back into position and reinstall the bolt removed in step 1.

GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER

BOLT TIGHTENING TORQUE (LB-FT)			
BOLT SIZE	TORQUE	BOLT SIZE	TORQUE
3/8"	25 LB FT	8MM	20 LB FT
7/16"	50 LB FT	10MM	38 LB FT
1/2"	60 LB FT	12MM	68 LB FT
3/4"	120 LB FT		

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.

RIGID[®]
HITCH INCORPORATED
 3301 WEST BURNSVILLE PARKWAY
 BURNSVILLE, MN 55337

REV.
8/15