

CLASS 3 TRAILER HITCH

R3-0518

TOYOTA RAV 4


TOOLS REQUIRED:

DRILLS: NONE

**WRENCHES: Ratchet, Torque Wrench,
Socket Extension, 10, 12, 17, and 19mm**

HITCH RATING: 4,500 LBS WEIGHT CARRYING, 450 LBS TONGUE WEIGHT / 4,500 LBS WEIGHT DISTRIBUTING, 450 LBS TONGUE WEIGHT.
WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

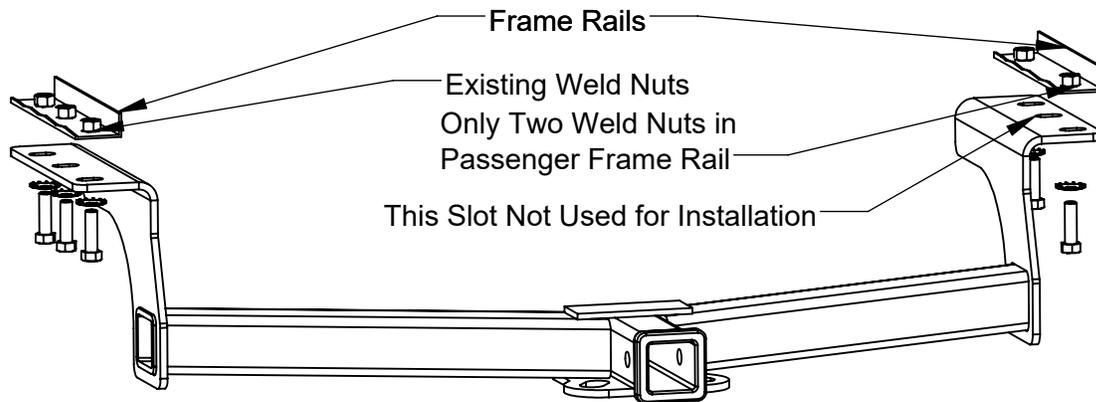

1. Remove appearance panel and tow hook from driver's side frame rail and return to owner.
2. Lower the exhaust by disconnecting the rubber isolator. Remove the rod mounted to the top of the canister by removing the two M8 hex bolts. Return the rod and bolts to the vehicle owner.
3. Raise hitch into position and secure with the five M12 hex bolts and conical washers provided.
4. Using a torque wrench tighten all fasteners to 68 LB-FT.
5. Raise the exhaust back in place and reattach the rubber isolator.

Thank you for purchasing a Rigid Hitch

HARDWARE PACKAGE (5) M12 X 1.25 X 40 HEX BOLTS (5) 1/2" CONICAL WASHERS

GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER

BOLT TIGHTENING TORQUE (LB-FT)			
BOLT SIZE	TORQUE	BOLT SIZE	TORQUE
3/8"	25 LB FT	8MM	20 LB FT
7/16"	50 LB FT	10MM	38 LB FT
1/2"	60 LB FT	12MM	68 LB FT
3/4"	120 LB FT	14MM	115 LB FT

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.

RIGID[®]
HITCH INCORPORATED
3301 WEST BURNSVILLE PARKWAY
BURNSVILLE, MN 55337

REV.
9/16