

## CLASS 3 TRAILER HITCH

**R3-0520**

Honda CR-V


### TOOLS REQUIRED:

DRILLS: NONE

WRENCHES: Ratchet, Torque Wrench,  
Socket Extension, 11/16" and 3/4"

**HITCH RATING: 4,500 LBS WEIGHT CARRYING, 450 LBS TONGUE WEIGHT. THIS HITCH IS NOT RATED FOR WEIGHT DISTRIBUTING. WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.**

**NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE**

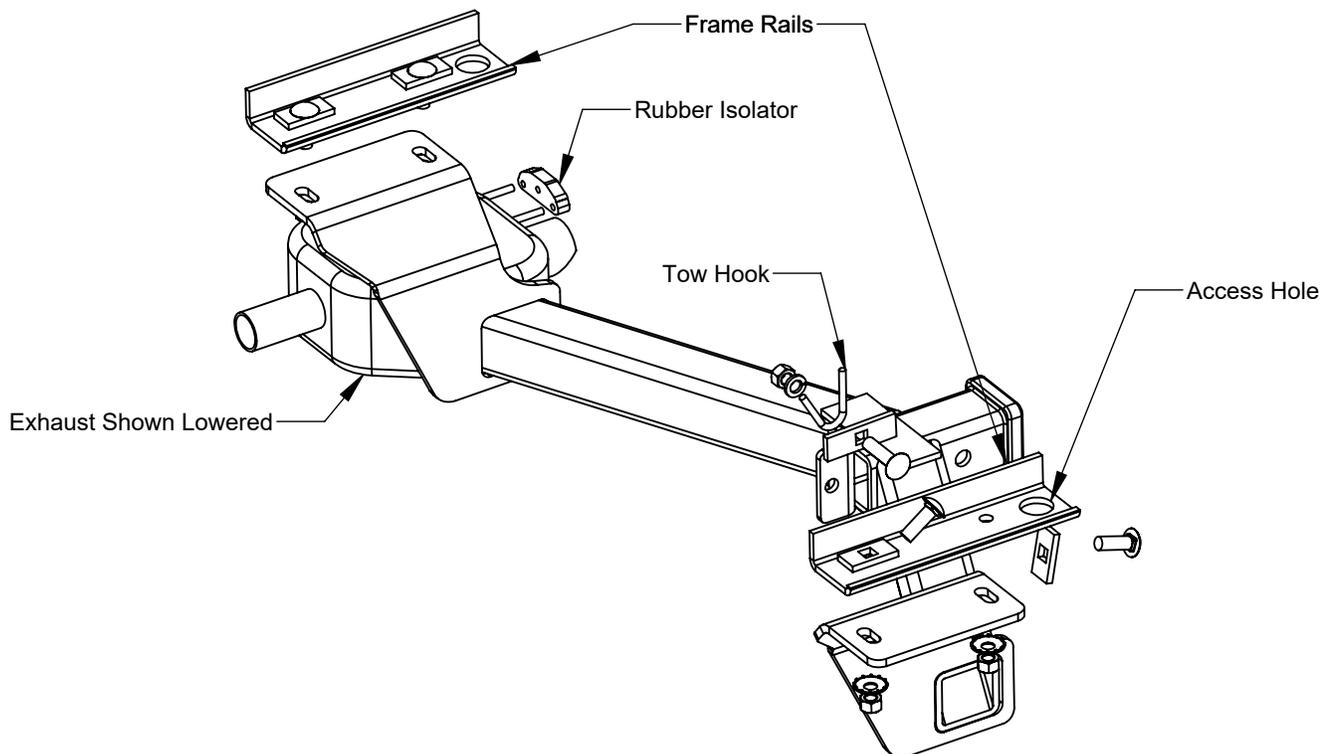

1. Lower the exhaust by disconnecting the rubber isolator(s). If more room is needed disconnect the isolator forward of the rear axle. Support exhaust to prevent damage. Spray lubricant eases removal.
2. Using the fish wires provided fish the (4) 7/16 carriage bolts and 1/4 x 1 x 2 blocks up through the access hole and into the mounting holes in the frame rails as shown above. Leave fish wires attached.
3. Carefully raise the hitch into position over the exhaust threading the fish wires through the mounting slots in the hitch sliding the tow hook attachment tab up against the tow hook.
4. Using care not to push hardware back into frame remove the fish wires and loosely secure with the conical washers and 7/16 hex nuts provided. The teeth of the conical washers go against the hitch.
5. Attach the hitch to the tow hook using the 1/2" carriage bolt, 1/4 x 1 x 3" block plate and loosely secure with the 1/2" lock washer and hex nut provided.
6. Tighten the 7/16" hardware to 50 LB FT, and the 1/2" hardware to 60 LB FT.
7. Raise the exhaust back into position reattaching all rubber isolators disconnected in step 1.

#### Hardware Package:

(4) 7/16-14 x 1-3/4" Carriage Bolts	(1) 1/2-13 x 2" Carriage Bolt	(4) 1/4 x 1 x 2" Block Plates
(4) 7/16" Conical Washers	(1) 1/2" Lock Washer	(1) 1/4 x 1 x 3" Block Plate
(4) 7/16" Hex Nuts	(1) 1/2" Hex Nut	
(4) 7/16" Fish Wires		

### GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER



THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. **DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.**

**RIGID**<sup>®</sup>  
**HITCH INCORPORATED**  
3301 WEST BURNSVILLE PARKWAY  
BURNSVILLE, MN 55337

REV.  
10/17