


**CLASS 4 TRAILER HITCH
R3-0861
GMC Full Size Van**

**TOOLS REQUIRED:
DRILLS: NONE
WRENCHES: 7/8"**

HITCH RATING: 5,000 LBS WEIGHT CARRYING, 500 LBS TONGUE WEIGHT / 10,000 LBS WEIGHT DISTRIBUTING, 1,000 LBS TONGUE WEIGHT.
WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

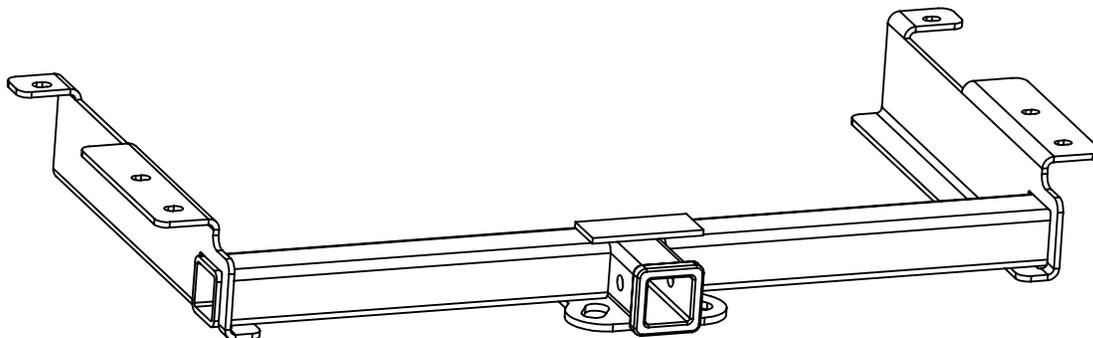

1. Assemble the (6) 1/2-13 x 1-3/4" carriage bolts and (6) 1/4 x 1-1/2 x 2" block plates.
2. Insert the carriage bolt assemblies into the frame rails through the access slots on the inboard side of the frame rails and into the attachment holes on the bottom of each frame rail.
3. Raise the hitch into position and secure with the conical washers and heavy hex nuts provided.
4. Tighten all fasteners to the appropriate torque specifications.

Thank you for purchasing a Rigid Hitch

TIGHTEN ALL FASTENERS TO THE TORQUE SPECIFICATIONS SHOWN BELOW

Hardware Package:	(6) 1/2-13 x 1-3/4" Carriage Bolts (6) 1/4 x 1-1/2 x 2" Block Plates (6) 1/2" Conical Washers (6) 1/2-13 Heavy Hex Nuts
-------------------	--

GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER

BOLT TIGHTENING TORQUE (LB-FT)			
BOLT SIZE	TORQUE	BOLT SIZE	TORQUE
3/8"	25 LB FT	8MM	20 LB FT
7/16"	50 LB FT	10MM	38 LB FT
1/2"	60 LB FT	12MM	68 LB FT
3/4"	120 LB FT		

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.

RIGID[®]
HITCH INCORPORATED
 3301 WEST BURNSVILLE PARKWAY
 BURNSVILLE, MN 55337

REV.
2/10