

CLASS 4 TRAILER HITCH

R3-0871

Colorado/ Canyon/ Isuzu I Series

TOOLS REQUIRED:


DRILLS: NONE

WRENCHES: Torque Wrench, 21mm, 22mm, 11/16"

HITCH RATING: 6,000 LBS WEIGHT CARRYING, 600 LBS TONGUE WEIGHT / 7,500 LBS WEIGHT DISTRIBUTING, 750 LBS TONGUE WEIGHT.

WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

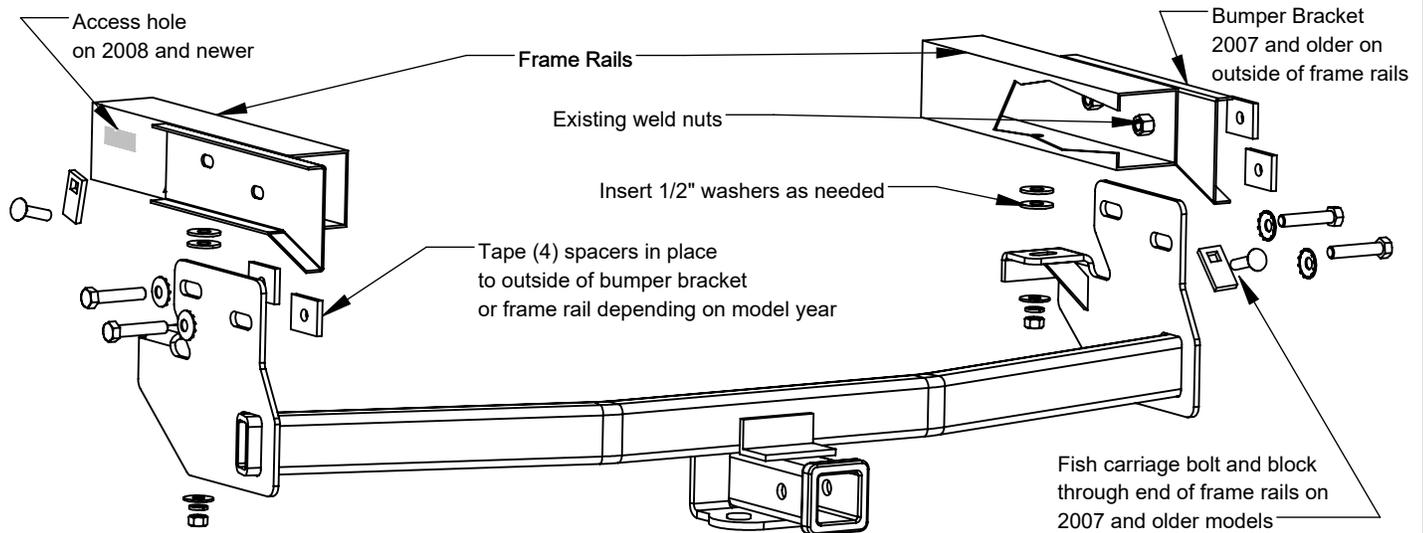

1. Remove the (4) bolts (2 per side) on the vertical sides of the frame rails that attach the bumper brackets to the frame, and return to owner. **Note:** On 2007 and older models the bumper brackets are on the outside of the frame rails. On 2008 and newer models the bumper brackets are inside the frame rails.
2. To aid installation it helps to tape the 5/8" thick spacers to the outside of the frame or bumper brackets aligning holes in spacers with weld nuts in frame rails.
3. Raise the hitch into position and secure with the (4) 14mm bolts and conical washers provided.


Note: Insert 1/2" flat washers between the forward mounting flange on the hitch brackets and the bottom of the frame rails as needed, to take up space that may be present on some models.

4. Using the fish wire provided insert the two 7/16" carriage bolts and block plates into the frame rails and through the forward mounting slots of the hitch brackets. **Note:** 2007 and older models fish carriage bolts in through the rear end of the frame rails. 2008 and newer models utilize the access holes in the outside vertical surface of the frame rails.
5. Secure with the (2) 7/16" flat washers, lock washers and hex nuts provided. Tighten to 50 LB-FT.
6. Tighten 14mm bolts to 100 LB-FT.

Thank you for purchasing a Rigid Hitch

Hardware Package:	(4) M14 x 2.00 x 60mm Hex Bolts	(2) 7/16" Lock Washers
	(4) 5/8 x 1 x 2-1/2" Spacers	(2) 7/16" Flat Washers
	(4) 1/2" Conical Washers	(2) 1/4 x 1 x 2" Sq. Hole Block Plates
	(2) 7/16 x 1-1/2" Carriage Bolts	(1) 7/16" Fish Wire
	(2) 7/16-14 Heavy Hex Nuts	(4) 1/2" Flat Washers

GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER

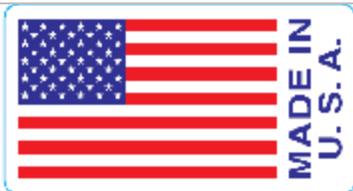

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.

RIGID[®]
HITCH INCORPORATED
3301 WEST BURNSVILLE PARKWAY
BURNSVILLE, MN 55337

REV.
9/19