

Bolt On Bucket Grab Hooks

RHA-002

Tools Required:

Drills: 1/2"


Wrenches: Open End, Ratchet, Torque Wrench,
3/4" Socket

RATING: Hooks are rated at 6,600 lbs WLL. Break strength is rated at 15,000 LBS.

WARNING: To prevent injury use safe rigging practices. Inspect all rigging equipment for damage before using. This product is intended for use with 3/8" chain.

NEVER exceed the WLL of 6,600 LBS per hook, or the capacity of your equipment whichever is less.

NOTE: Install parts loosely until all attachments are made.

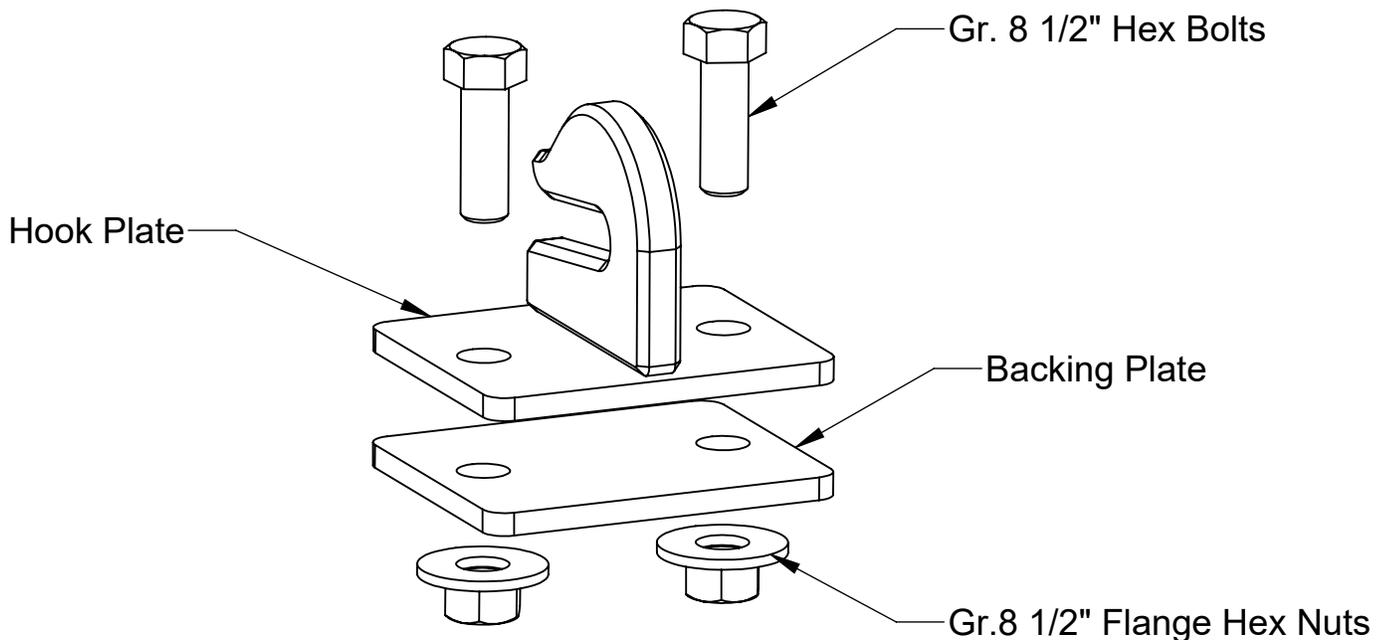

1. Place hook plates in desired locations. Use as templates to mark hole locations.
2. Drill holes, (2 per plate) using a 1/2" drill.
3. Insert 1/2" grade 8 hex bolts from the top side as shown.
4. Secure with backing plate, sandwiching the bucket, and flanged hex nuts provided.
5. Tighten all fasteners to 106 FT-LBS.

Thank you for purchasing a Rigid Hitch product

Included:


(2) Bucket Hook Plates

(4) 1/2-13 x 1-1/2" Gr. 8 Hex Bolts

(2) Backing Plates

(4) 1/2-13 Gr. 8 Flanged Hex Nuts

KEEP THIS INSTRUCTION SHEET

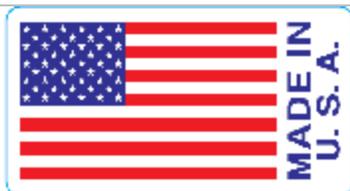

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. **DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.**

RIGID[®]
HITCH INCORPORATED
3301 WEST BURNSVILLE PARKWAY
BURNSVILLE, MN 55337

REV.
6/22